

KIT BÂTIMENT

REF.

NKITXLBAT2

Selon taille harnais


NKITXLBAT2..S / NKITXLBAT2..ML / NKITXLBAT2..XL

MAX
140 KG


DESCRIPTION

Kit muni d'un antichute à rappel automatique permettant à l'utilisateur une mobilité sur une distance maximale de 2 m. Testé à 140 kg pour une utilisation à la verticale et à l'horizontale. Composé également d'un harnais antichute confort 2 points (frontal et sternal), d'un anneau de sangle 1m et d'un sac de transport.

CONTENU

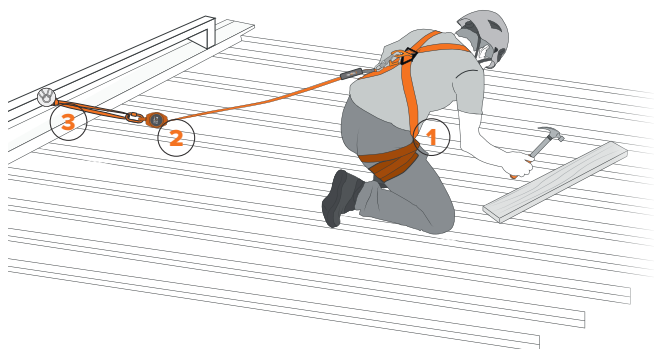

1

REF.

NUS65A

- Harnais antichute 2 points
- Cuissardes confort et boucles automatiques
- Disponible en 3 tailles



2

REF.

NEO020AK

- Antichute à rappel automatique 2m
- Testé pour une utilisation verticale / horizontale / facteur 2 à 140kg
- Connecteur acier à vis côté carter et automatique aluminium côté utilisateur



3

REF.

NAS10

- Anneau de sangle 1m
- Largeur 30mm



REF.

NSACT35L.NEO

- Sac de transport 35 litres
- Pochette transparente A4
- Bâche PVC

Conditionnement en boîte carton disponible

REFS. NKITXLBAT2..S.BC / NKITXLBAT2..ML.BC / NKITXLBAT2..XL.BC



RÈGLEMENT

2016 / 425

CERTIFICATION

EN 361 / EN 360
EN 795-B

CONSTRUCTION SET

MAX
140 KG
1



REF. NKITXLBAT2


According to harness size

NKITXLBAT2..S / NKITXLBAT2..ML / NKITXLBAT2..XL

DESCRIPTION

Fitted with a retractable type fall arrester this set offers a working distance of maxi 2 m. Tested to 140 kg and for vertical and horizontal use. Composed too a comfortable full body harness with 2 attachment points (back and front), a 1m webbing sling and a transport bag.

CONTENT

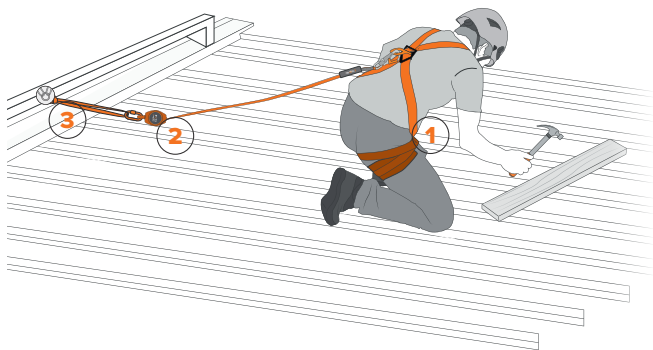

1

REF.

NUS65A

- 2 points full body harness
- Comfort legs and automatic bukles
- Available in 3 sizes



2

REF.

NEO020AK

- Retractable type fall arrester 2m
- Tested for vertical / horizontal / factor 2 use up to 140kg
- Steel screw gate connector on the housing side and automatic aluminium connector on the user side



3

REF.

NAS10

- Webbing sling 1m
- Width 30mm



REF.

NSACT35L.NEO

- 35 litres transport bag
- A4 clear pocket
- PVC tarpaulin

Available in cardboard boxes

REFS. NKITXLBAT2..S.BC / NKITXLBAT2..ML.BC / NKITXLBAT2..XL.BC



REGULATION

2016 / 425

CERTIFICATION

EN 361 / EN 360
EN 795-B